

HUSH BAR PLUS SYSTEM




Hush-Bar Plus system has been designed as an advanced resilient bar and clip system used to further optimise acoustic performance by mechanical decoupling and creating a more flexible ceiling, whilst being able to support heavier ceiling boards.

ACOUSTIC PERFORMANCE

Impact $L'_{nT,w}$ dB	Airborne $D_{nT,w}$ dB	Airborne $D_{nT,w} + C_{tr}$ dB
50	58	52

Results based on Hush-System HF25 Advanced test results incorporating Hush-Bar Plus System

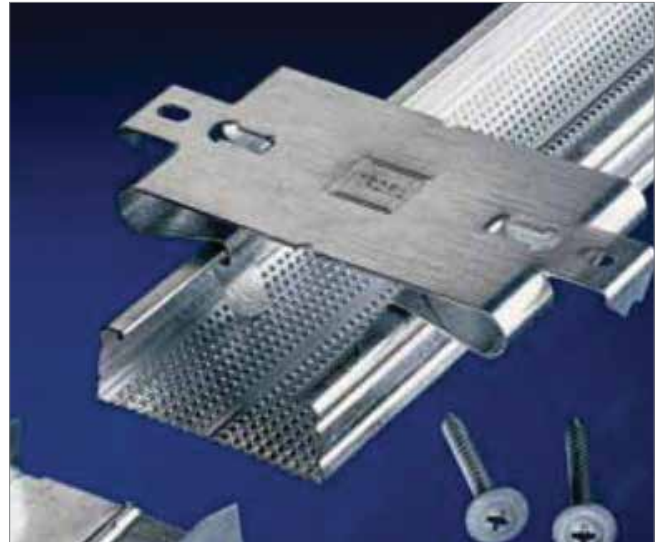

PRODUCT DATA

- Can be used as a decoupled ceiling system to the underside of timber and metal joisted construction
- Comprises of a decoupling spring clip, a metal bar, connecting sleeves and a perimeter channel
- Overall bar dimensions 2400mm long x 55mm wide by 25mm deep
- Overall system depth (including clips and bar) is 25mm

PROFILE



FEATURES

- ✓ A unique ceiling system that increases acoustic performance from standard resilient bar systems
- ✓ Superb acoustic performance
- ✓ Used within refurbishment and new build projects as part of a sound insulation system for separating ceilings
- ✓ Reduces both airborne and impact sound transmission
- ✓ Suitable for suspending up to 50kg/m²
- ✓ Building Regulations Part E (England and Wales), Section 5 (Scotland) and Part G (Northern Ireland)
- ✓ Can be used as part of a Robust Details Ceiling system
- ✓ Can be used as part of a Code For Sustainable Homes Development
- ✓ Easy to install

SUITABLE FOR:



HUSH ACOUSTICS

TEL: 0151 933 2026

EMAIL: info@hushacoustics.co.uk

www.hushacoustics.co.uk

hush-acoustics

@hushacoustics hushuk.acoustics

44 Canal Street, Bootle, Liverpool L20 8QU
Offices also based in London and Yorkshire



HUSH ACOUSTICS