


HUSH MULTI PANEL MF SYSTEM

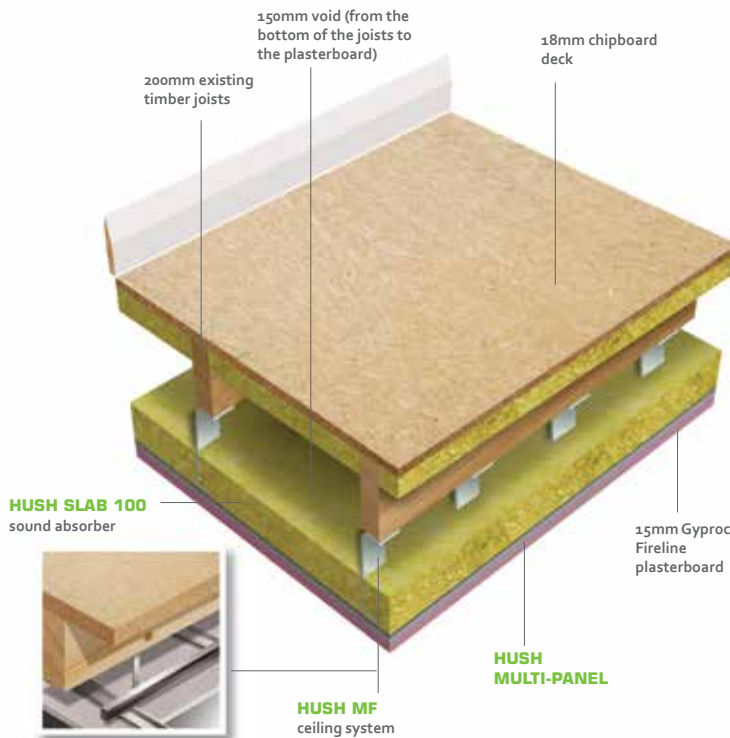

SPECIFICATION

- Install Hush Slab 100 Sound Absorber within the joists. Ensure the Hush Slab is tightly packed between the joists and ensure there are no gaps.
- Install the Hush MF Ceiling to the underside of the joists. Ensure the Hush MF System is installed using the Hush Acoustic Hangers. A minimum 150mm void is to be created from the underside of the joists to the back of the ceiling lining.
- Hush slab 100 sound absorber to be installed within the ceiling grid. Ensure the Hush Slab is installed tightly within the MF Ceiling System with no gaps.
- Install the Hush Multi Panel to the underside of the Hush MF Ceiling System. Overboard the Hush Multi Panel with a layer of 15mm Fireline Plasterboard.

FEATURES

- ✓ Complies with UK Building Regulations, Approved Document E (England & Wales), Section 5 (Scotland) and Part G (Northern Ireland)
- ✓ Meets all UK Building Regulations without the use of a floating floor covering in existing buildings.
- ✓ For use in change of use and refurbishment developments when there is no access to the floor above.

ACOUSTIC PERFORMANCE

Impact $L'_{nT,w}$ dB	Airborne $D_{nT,w}$ dB	Airborne $D_{nT,w} + C_{tr}$ dB
62	55	49

Results based on all Hush elements to be installed as per the system data sheet and installed as per the Hush installation guides. All flanking transmission paths to be isolated correctly.

BUILDING REGULATIONS STATEMENT

- Approved Document E (England & Wales) incorporates a unit of measurement to determine low frequency airborne sound transmission. Due to proven intrinsic difficulties of measuring low frequency sound, in domestic sized rooms, it must be expected that there could be significant deviations in the accuracy of these measurements.
- There will be variations in measurements from site to site in all UK Building Regulations whether it be Document E (England & Wales), Section 5 (Scotland) or Part G (Northern Ireland). These variations are caused by structural differences in buildings, general site conditions and workmanship.
- All these factors can influence the repeatability of both impact and airborne acoustic test results. Therefore, any test results must be considered as an indication only and no warranty can be given or implied as to the actual acoustic performance in any particular situation.

HUSH ACOUSTICS

TEL: 0151 933 2026

EMAIL: info@hushacoustics.co.uk

www.hushacoustics.co.uk

hush-acoustics

@hushacoustics hushuk.acoustics

44 Canal Street, Bootle, Liverpool L20 8QU
Offices also based in London and Yorkshire



HUSH ACOUSTICS